

SAROS SB-200-P

Saros® Sound Bar

DO Install the Device

The Saros® Sound Bar can be installed as part of a Crestron RL® 2 Group Collaboration system or on a wall as part of any integrated audio system. With the balanced and unbalanced inputs, the sound bar can work with any audio system.

In a Crestron RL System


Use the included thumb screws to attach the sound bar to the sound bar bracket. Refer to the quickstart included with the Crestron RL Group Collaboration system for details.

On a Wall

1. Place the mounting bracket on the wall.

NOTE: Use a laser level or snap a chalk line to mark the location of the bracket.

2. Secure the bracket to the wall with hardware that is appropriate for the mounting surface.

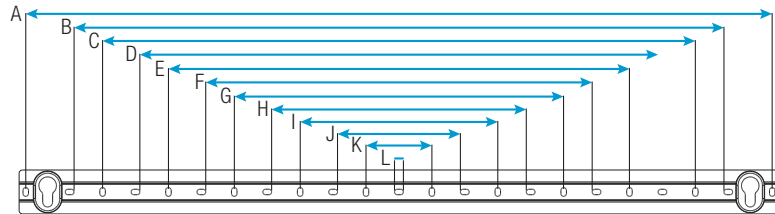


DIMENSION	INCHES	MILLIMETERS
A	26.8	680
B	23.3	592
C	21.3	540
D	18.6	472
E	16.5	420
F	13.9	352
G	11.8	300
H	9.1	232
I	7.1	180
J	4.4	112
K	2.4	60
L	0.3	8

NOTE: If a stud cannot be located, use the screwholes located adjacent to each keyhole slot.

DO Check the Box


QTY	PRODUCT	COLOR	PART NUM.
1	Bracket, Mounting		2048193
1	Cable, RCA®, Right-Angle, 6' (1.83 m)	Black	2047013
1	Connector, 5-Pin		2047025
1	Power Cord, 6' (1.83 m)	Black	2047024
2	Screw, 6-32, Thumb		2047009

3. Install the included thumb screws on the rear of the sound bar.
4. Connect the sound bar as described in “DO Connect the Device.”
5. Place the sound bar against the wall, above the mounting bracket, and lower the sound bar until the thumb screws rest in the mounting bracket.

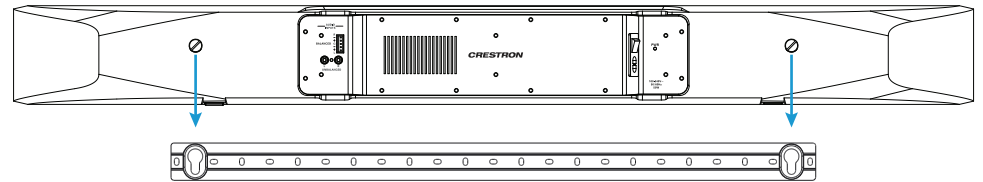

DO Connect the Device

Make the necessary connections as called out in the diagram below. Connect power last.

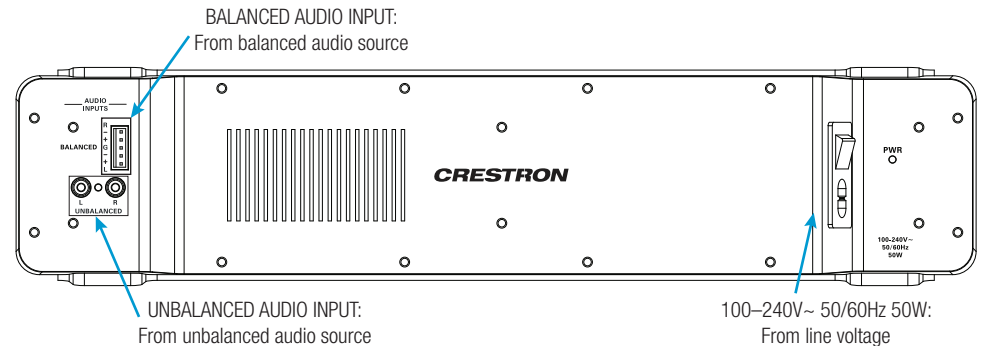

NOTE: Connect only one input.

NOTE: If using the included RCA® cable for connecting the UNBALANCED port, use the right-angled connector to allow the cable to fit between the wall and the sound bar.

DO Use the Device

Move the switch located above the 100-240V~ 50/60Hz 50W port to turn on the sound bar. The PWR LED lights, and sound from the connected source is produced.



DO Learn More

Visit the website for additional information and the latest firmware updates. To learn more about this product, use a QR reader application on your mobile device to scan the QR image.

Crestron Electronics
15 Volvo Drive, Rockleigh, NJ 07647
888.CRESTRON | www.crestron.com



CE As of the date of manufacture, the product has been tested and found to comply with specifications for CE marking.

Federal Communications Commission (FCC) Compliance Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

CAUTION: Changes or modifications not expressly approved by the manufacturer responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Industry Canada (IC) Compliance Statement

CAN ICES-3(B)/NMB-3(B)

Electrical Connection

"This product must be connected to an earthed mains socket-outlet."

- **Finland:** "Laite on liitettävä suojamaadoituskoskettimilla varustettuun pistorasiaan."
- **Norway:** "Apparatet må tilkoples jordet stikkontakt."
- **Sweden:** "Apparaten skall anslutas till jordat uttag."

The specific patents that cover Crestron products are listed at <http://www.crestron.com/legal/patents>.

The product warranty can be found at www.crestron.com/warranty.

Certain Crestron products contain open source software. For specific information, please visit www.crestron.com/opensource.

Crestron, the Crestron logo, Crestron RL, and Saros are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. RCA is either a trademark or registered trademark of VOXX International Corporation in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names of their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography.

This document was written by the Technical Publications department at Crestron.

©2017 Crestron Electronics, Inc.